


Steps to install Sadad QAR payment gateway opencart extension:

1. Login to admin and go to Extensions > Installer and Upload sadadqa2.0.ocmod.zip file. Now go to Extensions > Modifications and click the top right (refresh button) as shown in image below:

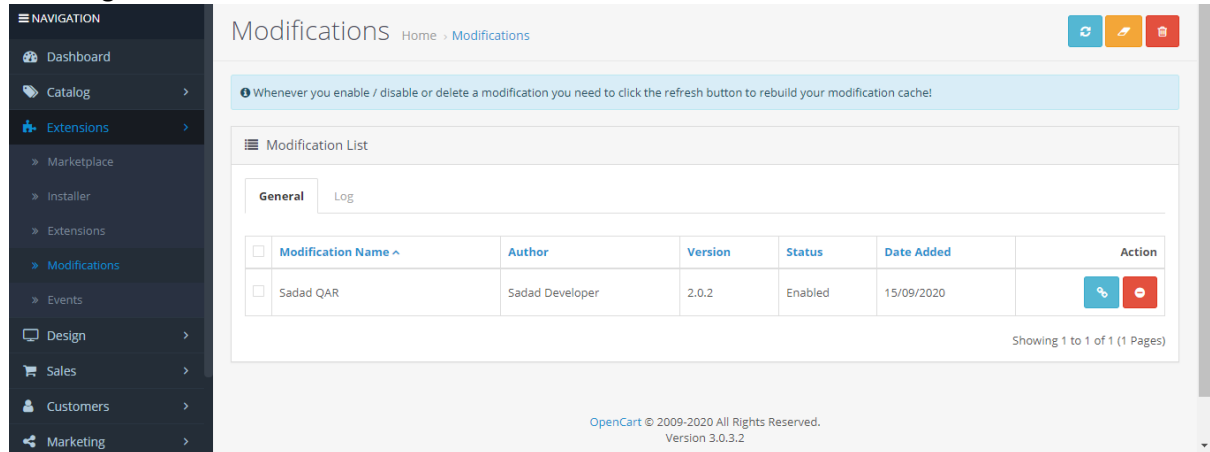

Now login to FTP or go to File Manager of your hosting. Find Storage folder and go to Storage/Cache and delete all files and folders there under cache folder. Storage folder might be present in public_html or outside that according to your OpenCart setup.

2. Now login to your admin panel and go to Extensions > Extensions. From Choose extension type dropdown select payments and wait for all payment gateways to load
3. Find Sadad QAR and click Green + icon in front of it. After that click on blue edit icon.



4. It will open settings page and enter your settings there and make sure you set status as Enabled. Set website name exactly same as you've used while generating your secret key. You can set Web checkout or Web checkout 2.2 and relevant setup. It should be noted here that iFrame must be enabled for your merchant account to use Web checkout 2.2
5. Save settings and you'll see Pay with credit/Debit card (Sadad) on checkout page payment method selection.